

SU 312-19T

Structural Thermal Barrier Polymer



Product description

SU 312-19T is a two component thermal barrier polymer, engineered to meet the rigorous demands of today’s high-performing fenestration systems. When mixed, the reactive resin and polymeric isocyanate form a robust, insulating polymer designed for superior thermal performance and shear

strength. The cured material resists fracturing during standard fabrication processes and meets all end-use performance criteria as tested in accordance with American Architectural Manufacturers Association (AAMA) and other industry specifications.

Table 1: Physical properties of uncured materials

| | 13-302A A-ISO | SU 312-19T B-Resin | Measurement |
|------------------|--------------------------|-------------------------------|--------------------|
| Color | dark brown | brown | |
| Specific gravity | 1.237 ± 0.006 | 1.078 ± 0.003 | |
| Viscosity | 205 ± 30 | 950 ± 100 | centipoise |
| Mix ratio | 70 | 100 | by volume |
| Mix ratio | 80 | 100 | by weight |

Table 2: Processing conditions of materials*

| | Value | Measurement |
|---|-------------------|---------------------------------------|
| Hand gel time (100 gram sample)** | 24 ± 3 | seconds |
| Machine gel time (100 gram sample)** | 16 ± 3 | seconds |
| Minimum debridging time*** | 5 | minutes |
| Recommended pour temperature of chemicals and metal | 25 ± 5 77 ± 10 | degrees Celsius degrees Fahrenheit |

*All mixing and tests were conducted at 25°C (77°F) unless otherwise noted.

**Gel time may vary slightly due to changes in ambient and chemical temperatures.

***Minimum debridging time will vary based on the shape and size of the extrusion and cavity, as well as curing conditions. Always verify that the material has reached a hardness of Shore D 65 before proceeding with debridging. Refer to Table 3 for optimal hardness.



Table 3: Performance characteristics of cured material (two hours at 70°C [158°F])

| | SI | IP | Test method |
|--|---------------------------------|---|------------------------|
| Tensile strength | 38 ± 7 N/mm ² | 5,500 ± 1,000 psi | ASTM D638 |
| Elongation or break | 50 ± 15% | 50 ± 15% | ASTM D638 |
| Modulus of elasticity | 1,655 N/mm ² | 240,000+ psi | ASTM D638 |
| Notched Izod impact | 85.4 ± 27 J/m | 1.60 ± 0.5 ft*lb/in | ASTM D256 |
| Thermal conductivity K-factor | 0.21 W/m-K | 1.456 Btu-in/ (hr-°F-ft ²) | ASTM C518/ NFRC 101 |
| Heat distortion temperature at 0.46 MPa (66 psi) | 65° ± 10°C | 149° ± 20°F | ASTM D648 |
| Coefficient of linear thermal expansion | 1.68 x 10 ⁻⁴ cm/cm°C | 9.34 x 10 ⁻⁵ in/in°F | ASTM D696 |
| Mixture density | 1.143 g/cm ³ | 71.4 lb/ft ³ | ASTM D1622 |
| Value | | | |
| Hardness | 77 ± 3 | Shore D | ASTM D2240 |

Note: The test data herein stated are typical values, which may be used as a guideline in evaluating this material for its intended use. We recommend that polymer properties be tested on a regular basis to ensure that both chemicals and machinery are meeting the requirements of the thermal barrier system.

Adhesion and dry shrinkage

The adhesive performance of thermal barrier chemicals largely depends on the condition of the substrate. Contaminants such as dirt, grease, poor rinsing, overspray, or insufficient pretreatment can significantly impair adhesion and must be eliminated prior to processing. For optimal bonding, Azon recommends utilizing a thermal barrier cavity with a mechanical lock to secure the bond. AAMA thermal cycle testing on the specific combination of finish and barrier is strongly recommended to verify long-term adhesion.

Processing

Cure rates can vary slightly based on the temperature of both the aluminum and the chemicals. To ensure proper curing and consistent performance, maintain materials and extrusions at 25±5°C (77±10°F). For optimal performance, the aluminum temperature must not fall below 18.3°C (65°F) during processing. Processing outside these temperature ranges can result in curing inconsistencies, fabrication issues, or dimensional distortion.



SU 312-19T

Structural Thermal Barrier Polymer

Product Data Sheet

IMPORTANT: Premature debridging can lead to distortion and potential safety hazards. Inadequately cured material may compress under the pressure of the Bridgemill saw's drive wheels, creating a hazardous kickback condition. Do not begin debridging until the polymer reaches a durometer hardness of Shore D 65.

Note: Azon Structural Urethane is approved solely for thermal barrier applications. Use in any other application requires written authorization from Azon.

Fabrication and Assembly

Azon thermal barrier polyurethane is compatible with standard fabrication techniques. Drilling and milling are preferred over punching to minimize stress. Avoid notching into the center of the poured cavity to reduce potential leak paths. Take care when fabricating or handling the filled extrusions at temperatures below 13°C (55°F) to avoid reducing impact resistance.

Azon thermal barrier materials cure rapidly and have excellent heat distortion resistance. However, full mechanical properties are achieved after seven days at ambient temperatures (25°C / 77°F). Handle filled and debridged extrusions with care during this curing period.

Storage and Handling

Azon thermal barrier components are very stable materials when properly handled. It is important to understand that these materials are moisture sensitive. Containers of the components must be stored in a dry

area where the temperature range does not fall below 10°C (50°F) and does not exceed 37°C (100°F) for prolonged periods. The expected shelf life of Azon chemical products is 12 months. When properly stored in unopened, sealed containers, the shelf life may be considerably longer. It is important to observe good inventory control by using the first in, first used practice. It is important to observe good inventory control by using the first in, first used practice. When detaching chemical supply lines from production machinery, always blanket chemicals with dry nitrogen or -40°C (40°F) dew point air to protect the contents of partial containers from moisture contamination.

Disposal

Dispose of unused product or residue in accordance with local regulations governing hazardous and nonhazardous waste. It is the user's responsibility to follow all applicable disposal guidelines.

Health and safety

Review the Safety Data Sheet (SDS) and product labels before use. Practice standard hygiene—clean hands thoroughly after using. Use a waterless hand cleaner followed by soap and water. Avoid inhaling vapors, skin contact, exposure to open wounds, or ingestion. Always use the product with adequate ventilation.

Ordering

To place orders or for pricing information, please contact Azon customer support at 1-800-788- 5942.



SU 312-19T

Structural Thermal Barrier Polymer

Product Data Sheet


Technical service

For technical assistance, including thermal barrier cavity review and mechanical lock recommendations, contact the AZO/Tec® department. Azon provides analysis and recommendations to enhance both new and existing systems for superior thermal and structural performance.

Cavity design

Cavity design should conform to AAMA TIR-A8-16 guidelines (see Figure 1 below). The AZO/Tec® team offers thermal simulation, design guidance, and support to help customers develop energy-efficient and structurally sound fenestration systems.

Figure 1: Cavity recommendations

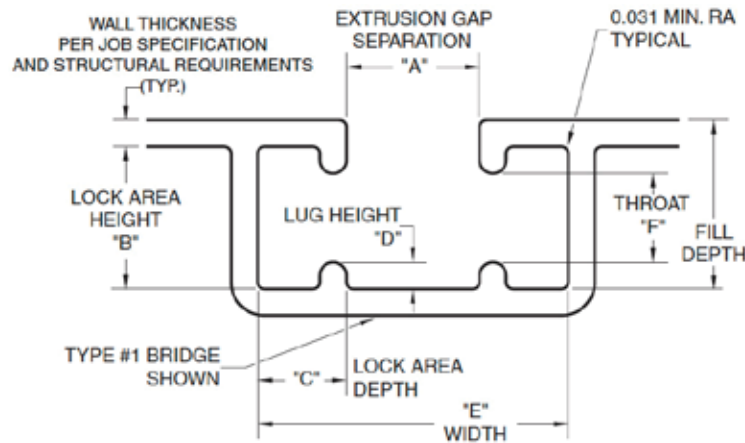

Cavity data

| Standard Designation | "A" | "B" | "C" | "D" | "E" | "F" | Area mm ² (in ²) | Volume ml/m (in ² /ft) |
|----------------------|--------------|--------------|--------------|--------------|---------------|--------------|---|-----------------------------------|
| AA | 5.18 (0.204) | 6.86 (0.270) | 2.79 (0.110) | 1.02 (0.040) | 10.77 (0.424) | 4.83 (0.190) | 70.96 (0.110) | 71 (1.320) |
| BB | 6.35 (0.250) | 7.14 (0.281) | 4.06 (0.160) | 1.14 (0.045) | 14.48 (0.570) | 4.85 (0.191) | 100.65 (0.156) | 101 (1.872) |
| CC | 6.35 (0.250) | 7.92 (0.312) | 4.78 (0.188) | 1.27 (0.050) | 15.90 (0.626) | 5.38 (0.212) | 123.23 (0.191) | 123 (2.292) |
| DD | 7.92 (0.312) | 8.89 (0.350) | 5.49 (0.216) | 1.57 (0.062) | 18.90 (0.744) | 5.74 (0.226) | 165.81 (0.257) | 166 (3.084) |
| EE | 9.53 (0.375) | 9.53 (0.375) | 5.74 (0.226) | 1.57 (0.062) | 21.01 (0.827) | 6.38 (0.251) | 199.35 (0.309) | 199 (3.708) |

WARRANTY The information contained in this document is to assist customers in determining whether our products are suitable for their applications. Our products are intended for sale to industrial and commercial customers. The customer must inspect and test our products before use, and satisfy themselves as to the contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials, and in no event shall we be liable for special, incidental, or consequential damages.

